

## Dome Fiber Optic Splice Closure

### CV014

#### Description:

CV014 is widely applied to the splicing, distributing variable optical cables and splitting.



#### Feature:

- 1) Adapter: can load 36pcs SC simple adapters or 36pcs LC duplex adapters
- 2) Splitter: can loaded 1pc PLC splitter 1\*8,1\*16 or 1\*32
- 3) Splice tray: 3pcs, each 24cores
- 4) Cable port: 5 cable ports: 4pcs( $\phi$ 18mm), 1pcs ( $\phi$ 42mm, cable no cutting). All cable ports are mechanical sealing
- 5) With different size rubber gasket for simplex, FTTH drop cable entry/exit
- 6) Waterproof: IP68
- 7) Wall-mounting, aerial hanger and pole holding
- 8) Material: high impact resistance PP materials with UV


#### Specification:

Model	Capacity	Dimension	Splice tray	Weight
CV014	72 fibers Max. 144 fibers	$\phi$ 182.5 x 521.1 mm	3pcs, each 24 fibers If without adapter panel, Max.6pcs	4.0 kgs

#### Accessories:



**Size(mm):**

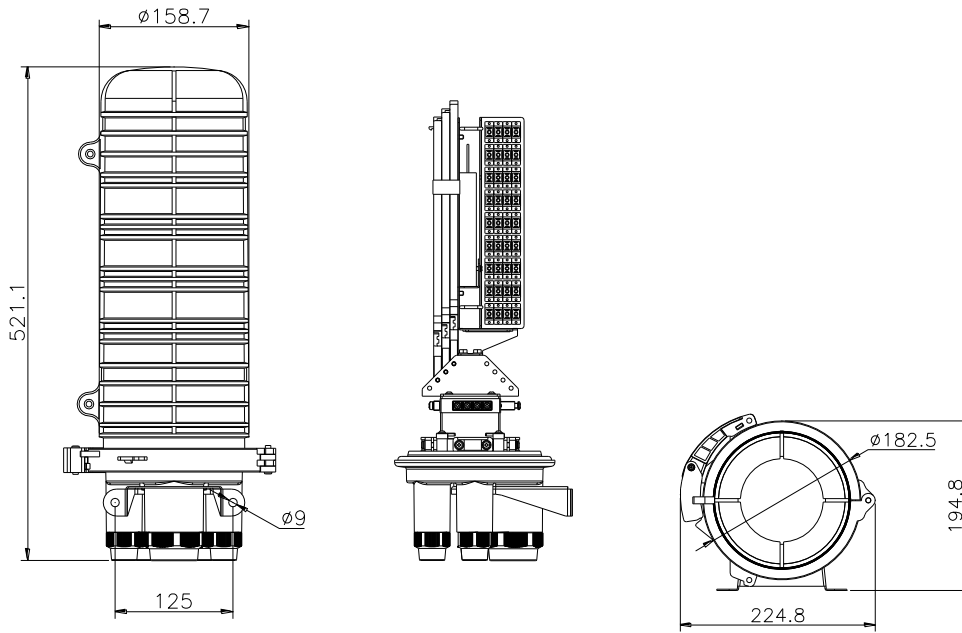

**Cable distribution:**

