

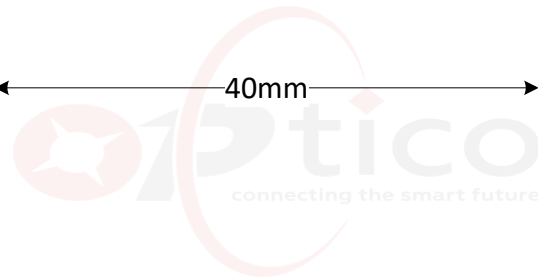
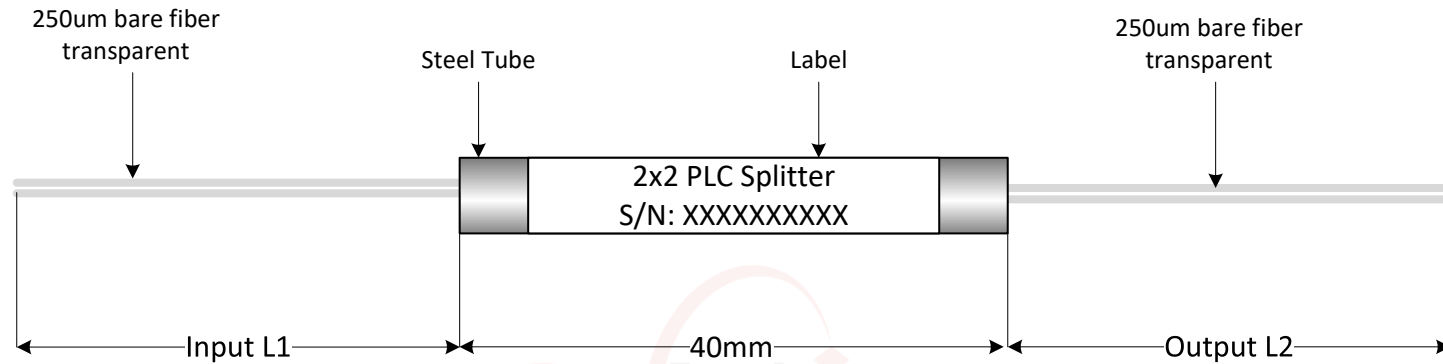




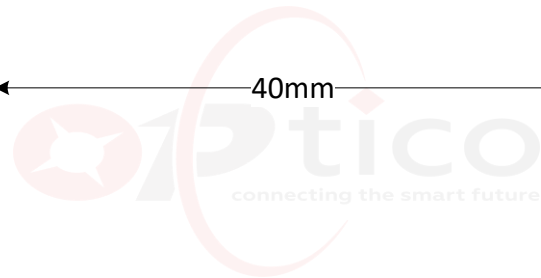
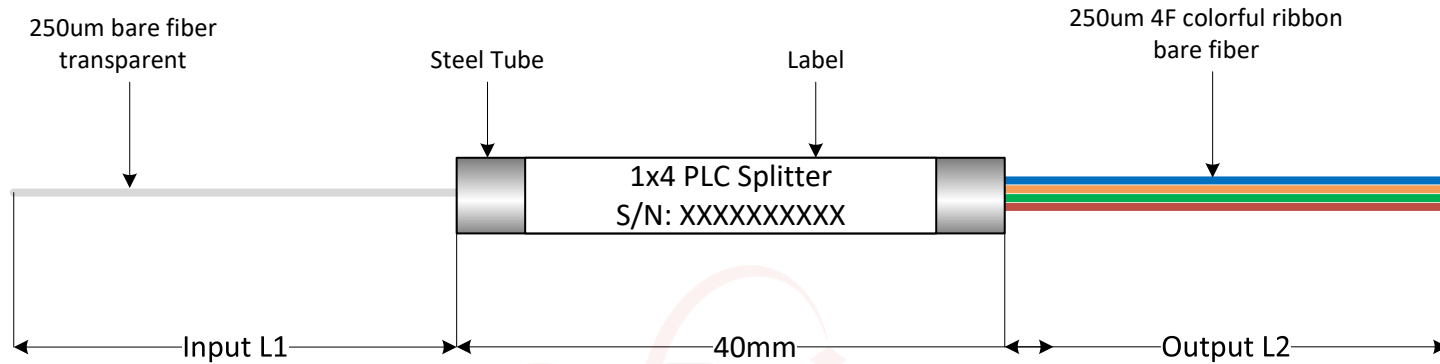
PLC Splitter Parameter		1x2
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	4.0 dB
PDL	Max.	0.2 dB
Uniformity	Max.	0.4 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		40*4*4mm

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	PLC Splitter 1x2 Mini Type 250um bare fiber without connectors						OP-102-250-XXM-NC		
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
						APPROVED	STEVEN Zhang	DATE	2025.06.10





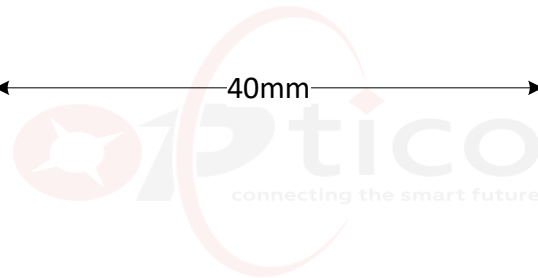
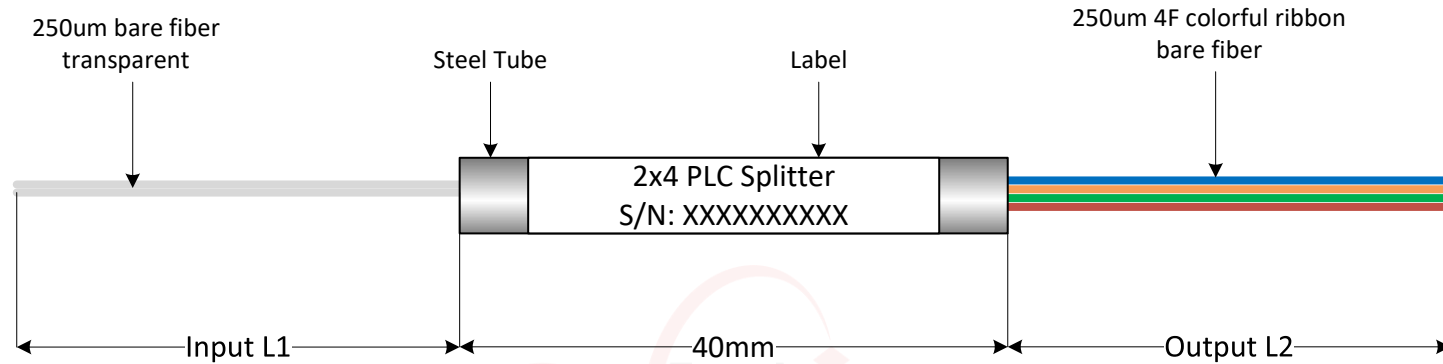
PLC Splitter Parameter		2x2
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	4.2 dB
PDL	Max.	0.3 dB
Uniformity	Max.	1.0 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		40*4*4mm

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model		PLC Splitter 2x2 Mini Type 250um bare fiber without connectors					OP-202-250-XXM-NC		
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
							APPROVED	STEVEN Zhang	DATE





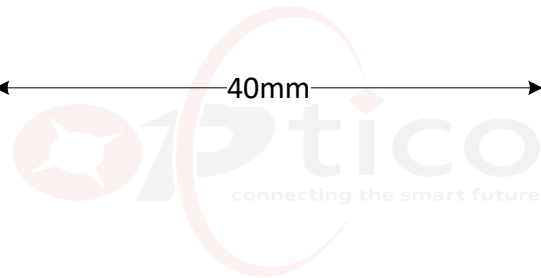
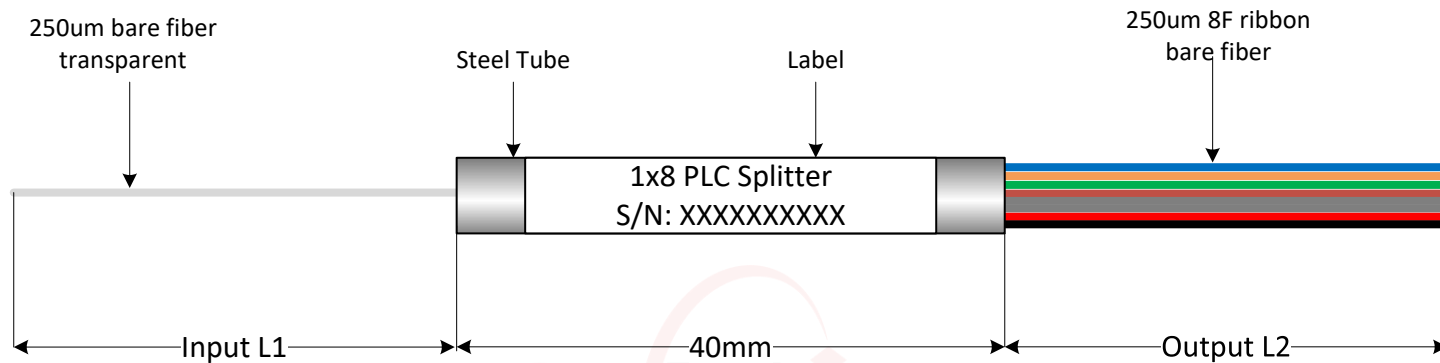
PLC Splitter Parameter		1x4
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	7.2 dB
PDL	Max.	0.2 dB
Uniformity	Max.	0.6 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		40*4*4mm

 SHENZHEN OPTICO COMMUNICATION CO., LTD.									
Model	PLC Splitter 1x4 Mini Type 250um bare fiber without connectors	OP-104-250-XXM-NC							
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
						APPROVED	STEVEN Zhang	DATE	2025.06.10





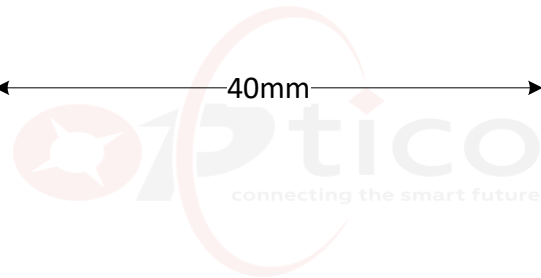
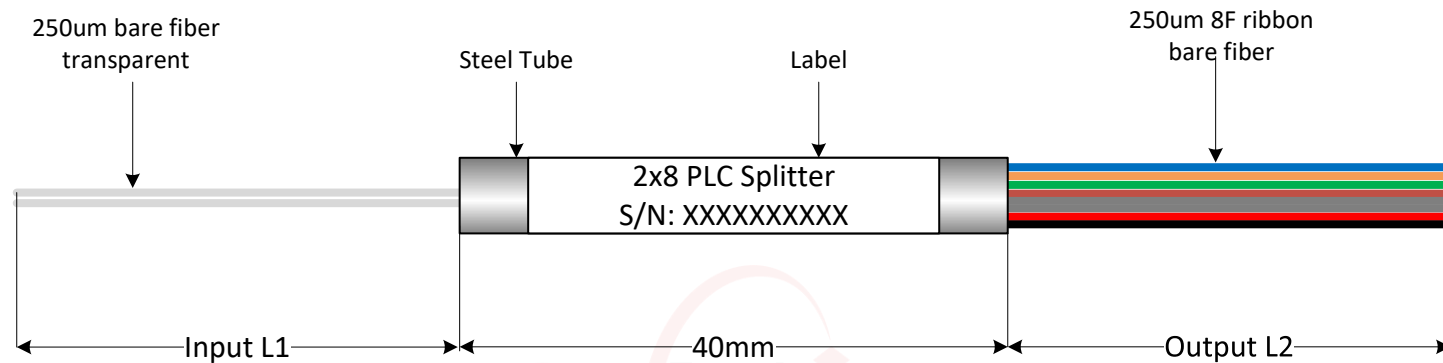
PLC Splitter Parameter		2x4
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	7.4 dB
PDL	Max.	0.3 dB
Uniformity	Max.	1.5 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		40*4*4mm

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model		PLC Splitter 2x4 Mini Type 250um bare fiber without connectors					OP-204-250-XXM-NC		
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
						APPROVED	STEVEN Zhang	DATE	2025.06.10





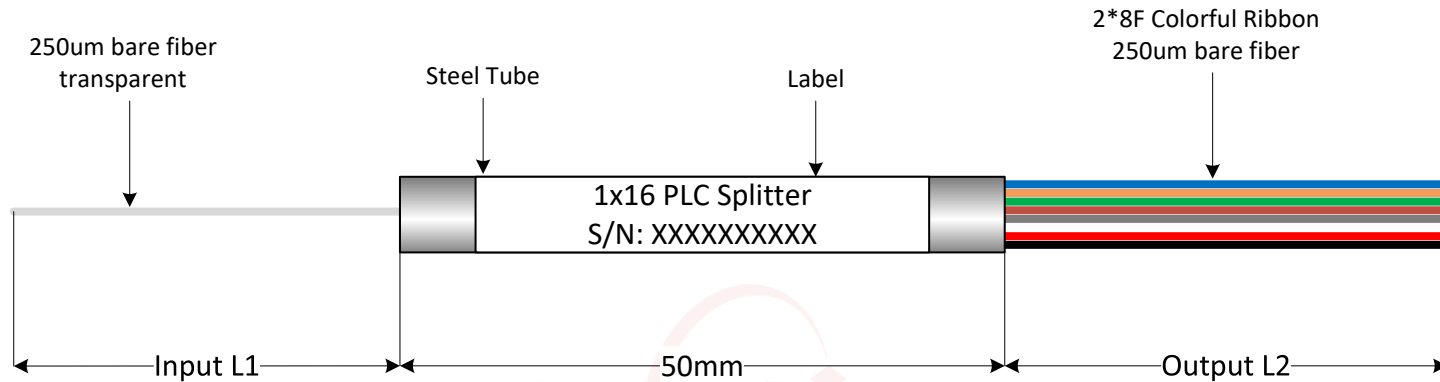
PLC Splitter Parameter		1x8
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	10.5 dB
PDL	Max.	0.2 dB
Uniformity	Max.	0.8 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		40*4*4mm

 SHENZHEN OPTICO COMMUNICATION CO., LTD.									
Model	PLC Splitter 1x8 Mini Type 250um bare fiber without connectors	OP-108-250-XXM-NC							
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
						APPROVED	STEVEN Zhang	DATE	2025.06.10





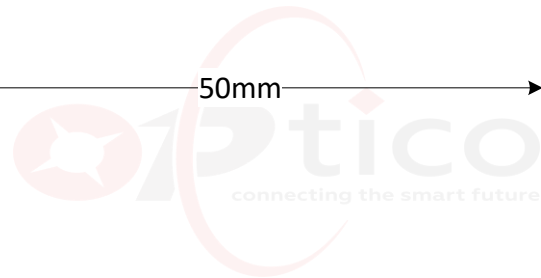
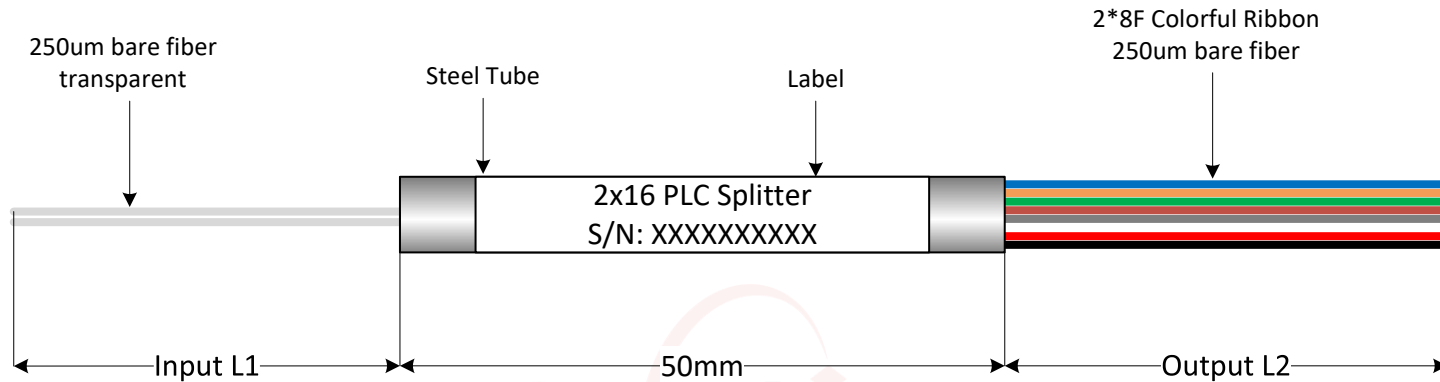
PLC Splitter Parameter		2x8
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	10.8 dB
PDL	Max.	0.3 dB
Uniformity	Max.	1.5 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		40*4*4mm

 SHENZHEN OPTICO COMMUNICATION CO., LTD.									
Model	PLC Splitter 2x8 Mini Type 250um bare fiber without connectors	OP-208-250-XXM-NC							
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
						APPROVED	STEVEN Zhang	DATE	2025.06.10





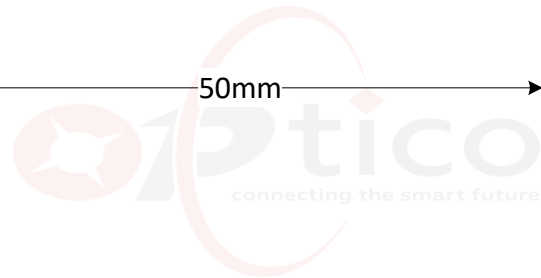
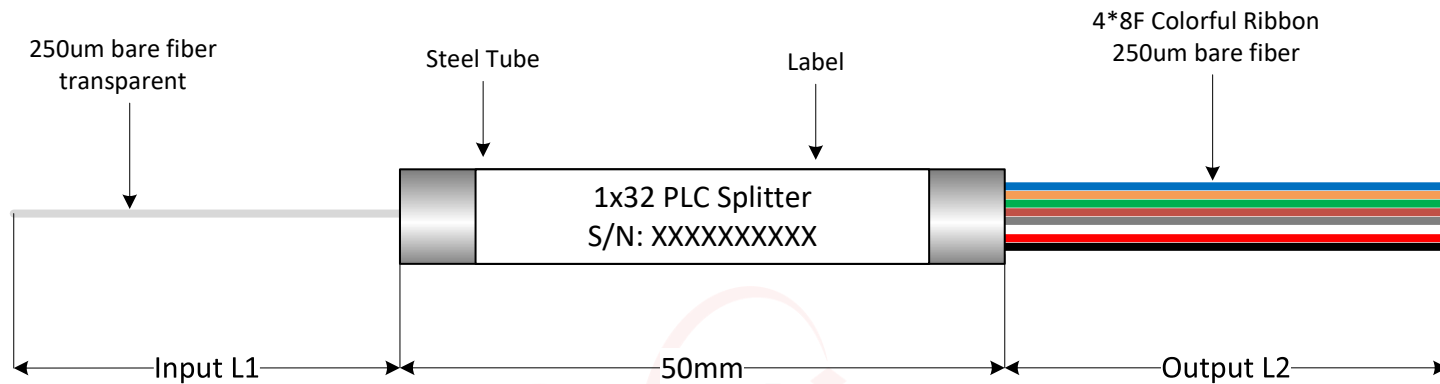
PLC Splitter Parameter		1x16
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	13.7dB
PDL	Max.	0.3 dB
Uniformity	Max.	1.2 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		50*4*4mm

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	PLC Splitter 1x16 Mini Type 250um bare fiber without connectors						OP-116-250-XXM-NC		
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
						APPROVED	STEVEN Zhang	DATE	2025.06.10





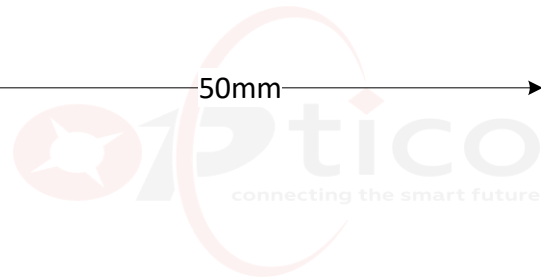
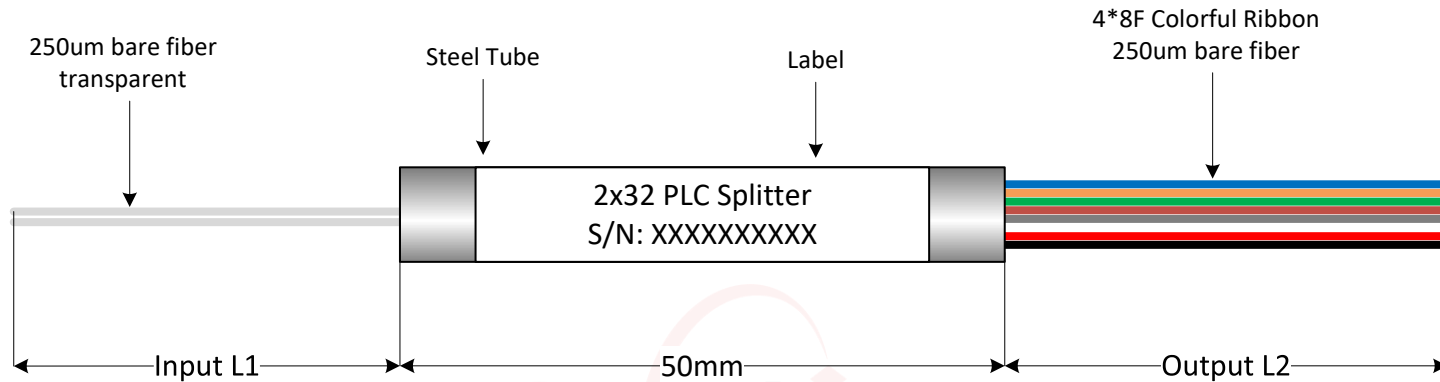
PLC Splitter Parameter		2x16
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	14.0 dB
PDL	Max.	0.3 dB
Uniformity	Max.	2.0 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		50*4*4mm

 SHENZHEN OPTICO COMMUNICATION CO., LTD.									
Model	PLC Splitter 2x16 Mini Type 250um bare fiber without connectors	OP-216-250-XXM-NC							
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
							APPROVED	STEVEN Zhang	DATE





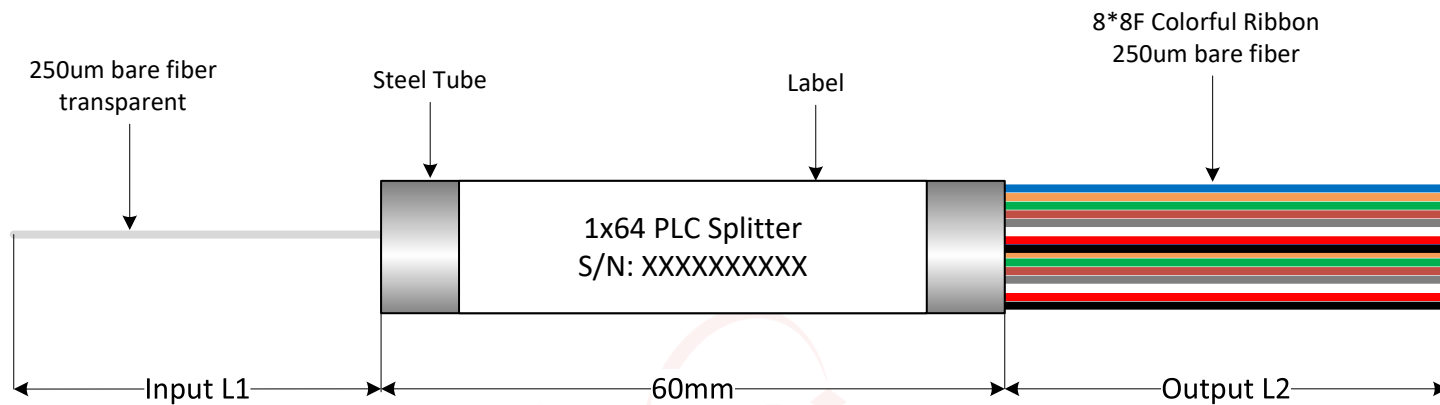
PLC Splitter Parameter		1x32
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	17.0dB
PDL	Max.	0.3 dB
Uniformity	Max.	1.5 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		50*7*4mm

 SHENZHEN OPTICO COMMUNICATION CO., LTD.									
Model	PLC Splitter 1x32 Mini Type 250um bare fiber without connectors	OP-132-250-XXM-NC							
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
							APPROVED	STEVEN Zhang	DATE





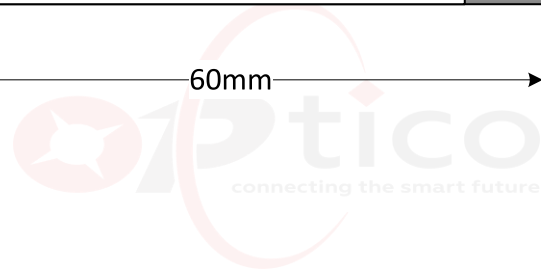
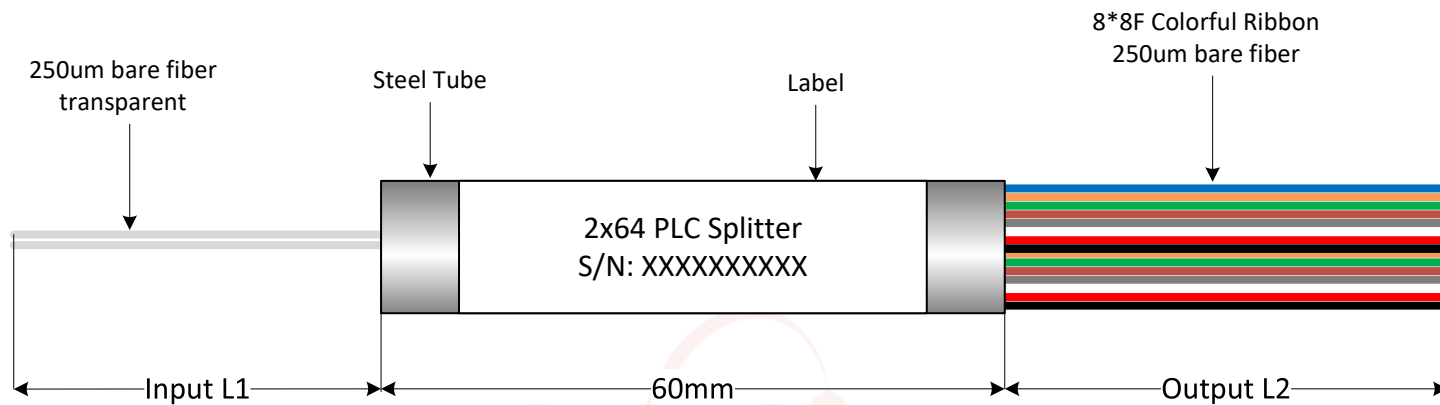
PLC Splitter Parameter		2x32
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	17.5dB
PDL	Max.	0.3 dB
Uniformity	Max.	2.0 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		50*7*4mm

 SHENZHEN OPTICO COMMUNICATION CO., LTD.									
Model	PLC Splitter 2x32 Mini Type 250um bare fiber without connectors	OP-232-250-XXM-NC							
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
							APPROVED	STEVEN Zhang	DATE





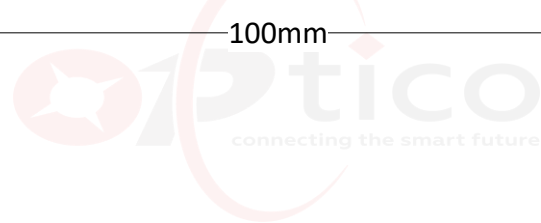
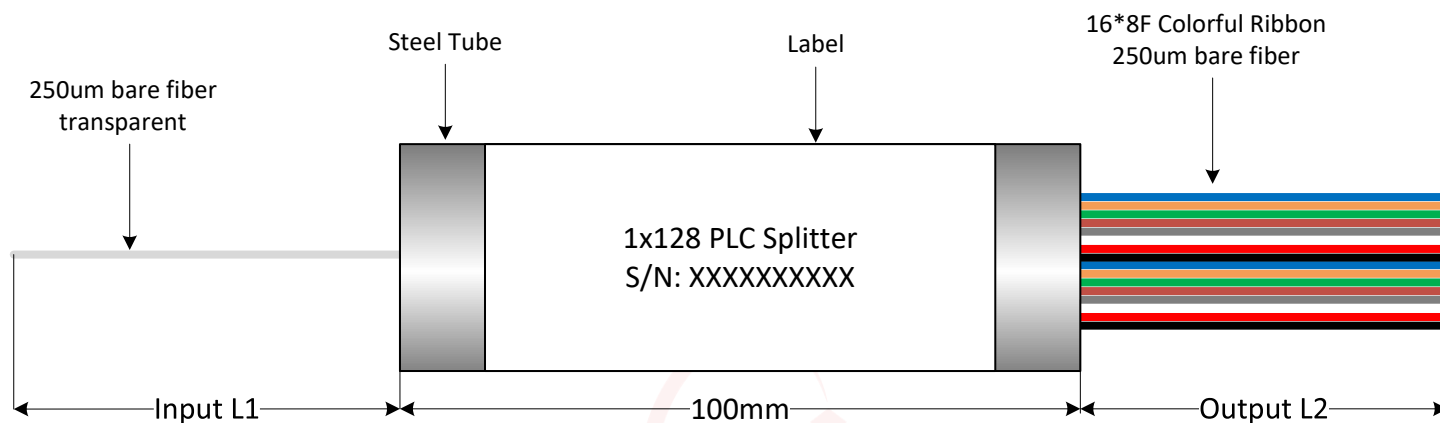
PLC Splitter Parameter		1x64
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	20.6dB
PDL	Max.	0.35 dB
Uniformity	Max.	2 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		60*7*4mm

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	PLC Splitter 1x64 Mini Type 250um bare fiber without connectors						OP-164-250-XXM-NC		
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
							APPROVED	STEVEN Zhang	DATE





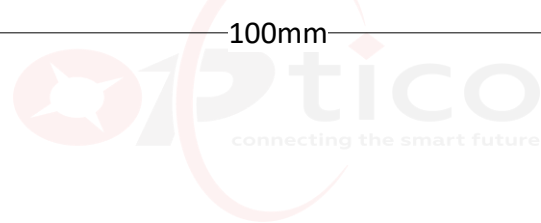
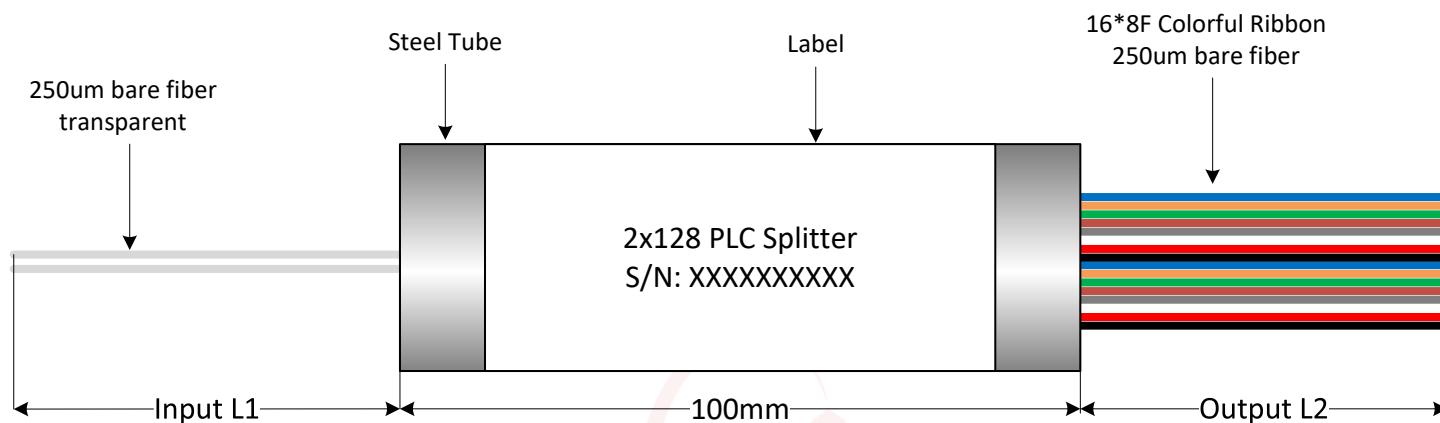
PLC Splitter Parameter		2x64
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	22dB
PDL	Max.	0.5 dB
Uniformity	Max.	2.5 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		60*7*4mm

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model		PLC Splitter 2x64 Mini Type 250um bare fiber without connectors					OP-264-250-XXM-NC		
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
							APPROVED	STEVEN Zhang	DATE





PLC Splitter Parameter		1x128
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	23.5dB
PDL	Max.	0.35 dB
Uniformity	Max.	2 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		100*40*6mm

 SHENZHEN OPTICO COMMUNICATION CO., LTD.									
Model	PLC Splitter 1x128 Mini Type 250um bare fiber without connectors	OP-1128-250-XXM-NC							
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
							APPROVED	STEVEN Zhang	DATE



PLC Splitter Parameter		2x128
Operating Wavelength		1260~1650nm
Test Wavelength		1310/1490/1550nm
Insertion Loss	Max.	24.5dB
PDL	Max.	0.4 dB
Uniformity	Max.	2 dB
Return Loss	Min.	55 dB
Directivity	Min.	55 dB
Operating Temperature		-40~+85°C
Storage Temperature		-40~+85°C
Fiber Length		1M/as request
Steel Tube Dimension		100*40*6mm

 SHENZHEN OPTICO COMMUNICATION CO., LTD.									
Model	PLC Splitter 2x128 Mini Type 250um bare fiber without connectors	OP-2128-250-XXM-NC							
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.10
							APPROVED	STEVEN Zhang	DATE